


Econoseal 36way Plug Pin Removal

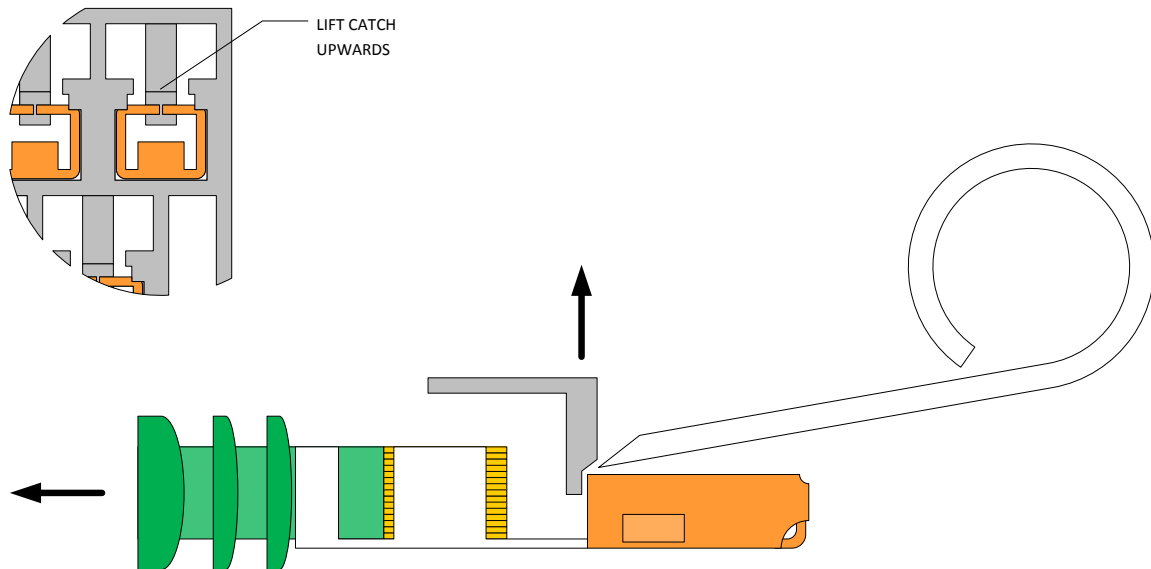

Remove the front locking plate (white) from the plug to expose the 36 terminals.

Use a pin removal tool to lift the catch tab and then gently pull the cable from the rear (as indicated above) to withdraw the terminal.

Insert the terminal firmly until you feel a positive click.

WARNING: do **NOT** force or lever a test probe (>0.8mm) into the terminal opening. This can deform the terminal contact spring and result in a poor ECU connection.